


IP68 Design



Coil	Power VA for 50 Hz	Consumption Watt
.032	24/15	11
.012	35/24	18,5
.702	incl. rectifier	25
.802	incl. rectifier	24
.322	incl. rectifier	30
.242	incl. rectifier	46
.272	incl. rectifier	100
.352	incl. rectifier	150
.402	incl. rectifier	250

Encapsulated coil with IP68 for permanent underwater use (Only for 2/2-Way solenoid valves)

- Solenoid valves: all control types
- Pressure range: vacuum to 900 bar
- Dimensions: 0.5-300 mm
- Cable length: 3 m as standard
5 m cable or 10 m cable on request
- Valves available in nickel-plated version
- With flange or thread connection available

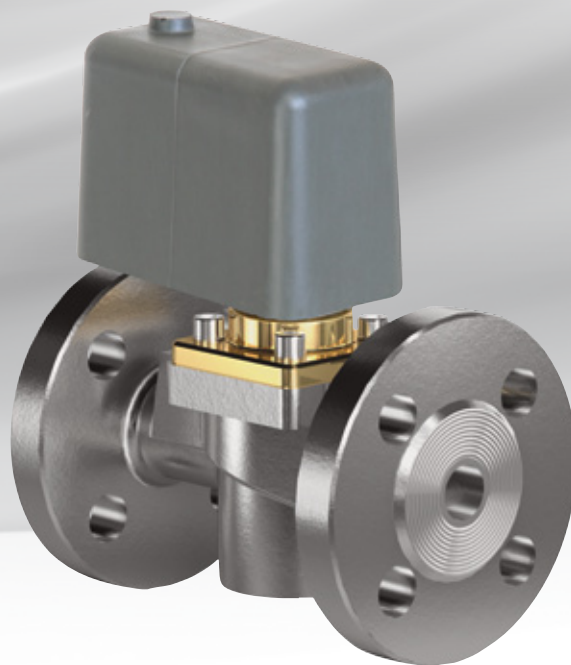

GSR Ventiltechnik GmbH & Co. KG
Im Meisenfeld 1 • D-32602 Vlotho
P.O. Box 2060 • D-32595 Vlotho

Innovative Valve Technology